

Data sheet:

DC-Load break switch

Model S6R 320A 1500V DC

telergon
g o r l a n



Indicative picture

Electrical data (according to UL98B)

Thermal current I_{th} (-20 to 50 °C)

320A

DC Rated operational current I_e (A)

Voltage (DC)	Category of operation	I _e
1500 V	UL98B	320

Short-circuit behaviour

Rated short-time withstand current (0.05 sec) I _{cc}	10kA
---	------

Connection capacity

Maximum busbar connection range	2x 4x32
Tightening torque (N·m)	24
Maximum weight (kg)	5

Standards

UL98B



Quality Telergon, SAU

ISO 9001 & 14001




Testing as per UL Approvals



Codes

Case size (A)	Poles	Switch code	Accessories	Codes for accessories
Size 1	2	S6R0320CBS00L	Direct handle Panel handle Auxiliary contact	DS-SI11 DS-SA11 D5LAU01

Connection diagram CB




**DO NOT USE IN
GROUNDED INSTALLATIONS**

You will find detailed information about our products on our web site www.telergon.com





DC Switch-Disconnecter
S6R0320CBS00L

TELERGON,SAU
Data subject to change without
notice (printed: 02/12/2019)

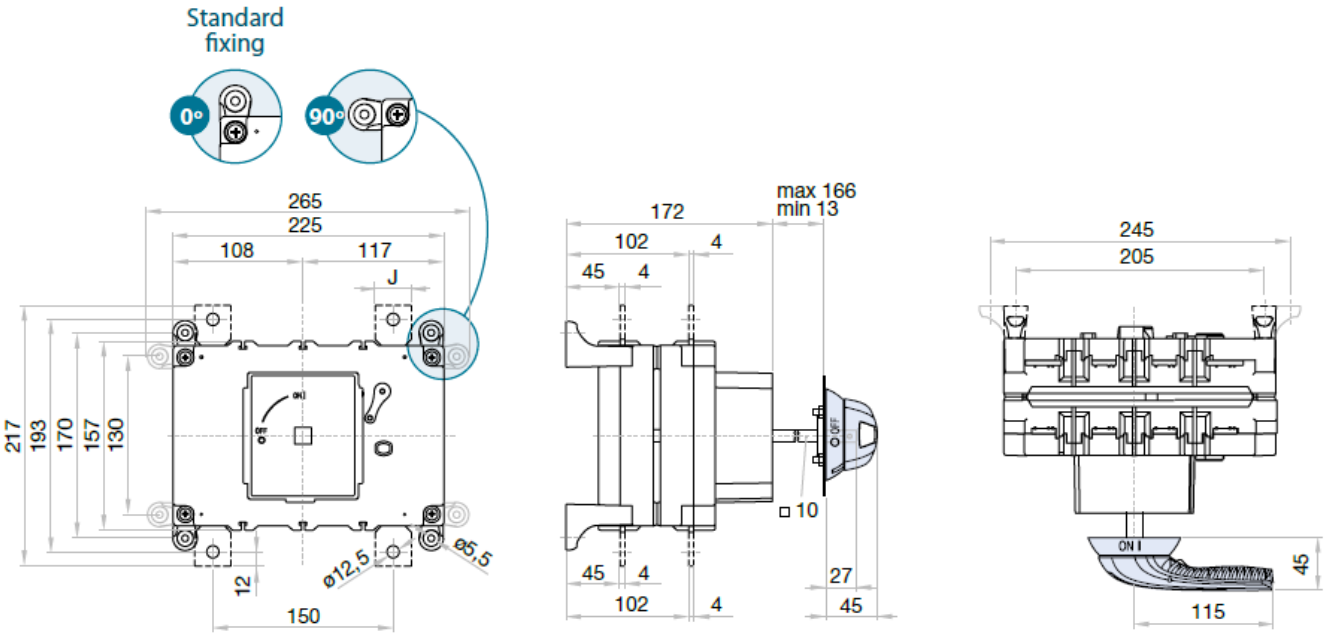

J=30



H max (Cu)		L max (Cu)			M	
mm	lb.inch	mm	lb.inch		Nxm	lb.inch
4	5/32	32	1-1/4	M12	24	212

You will find detailed information about our products on our web site www.telergon.com



DC Switch-Disconnecter
S6R0320CBS00L

TELERGON,SAU
Data subject to change without
notice (printed: 02/12/2019)