

AC Fuse Disconnect Switch - Class J – 60A

Front operation, direct or external handle

Part number: M3-00603PTJ400L

**Indicative picture***Standards**

UL98
CSA-C22.2 No. 4
Guide WHTY
File E363652
IEC 60947-3

**Quality Telergon**

ISO 9001 & 14001

**Electrical data (according to UL98):****Fuse type**

J27x60

Electrical Characteristics

Number of poles	3
Rated voltage	600 Vac
Rated current (A)	60

Temperature

Operating temperature	-5...+122F / -15...+50°C
Storage temperature	-40...158F / -40...70°C

Max. HP rating / motor FLA current

240 Vac	15/42
480 Vac	30/40
600 Vac	50/52

Short-circuit ratings at 600V

200 kA

Connection terminals

Max. connection section / AWG	#6 2/0
-------------------------------	--------

Mechanical endurance

Number of mechanical operations	10000
Number of electrical operations	6000

Codes





Size	Poles	Switch Part number	Accessories	Part Number
00	3P	M3-00603PTJ400L	External handle (blue)*	DM3SAB3
			External handle with TEST position (blue)*	DM3SAB4
			External handle (red/yellow)*	DM3SRB3
			Direct handle	DM3SIB1
			Shaft for external handle Length= 250mm (6.96")	DM3EP03
			Shaft for external handle Length= 250mm (9.84")	DM3EP01
			Shaft for external handle Length= 387mm (15.23")	DM3EP02
			Lateral external handle (blue)*	DM3SBB2 (with shaft included Length = 177mm (6.96")
			Lateral external handle (red/yellow)	DM3SEB2(with shaft included Length = 177mm (6.96")
			Lateral direct handle (blue)	DM3SSB1
			Auxiliary contact	DM3AUB1
			Auxiliary contact holder	DM3ASB1
			Shaft centering guide	DS-EC00

*External panel handle with Lock out - tag out capability. UL type NEMA 4X

Visit our website for more information www.telergon.com

AC Fuse Disconnect Switch
M3-00603PTJ400L

TELERGON, SAU
Data subject to change without
notice (printed: 21/10/2025)

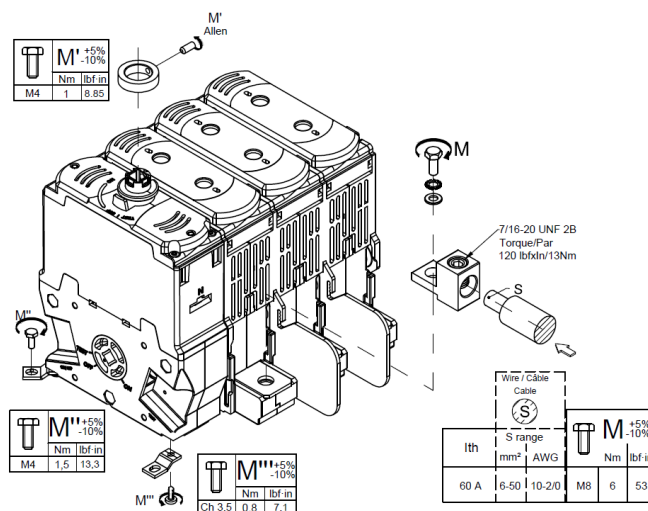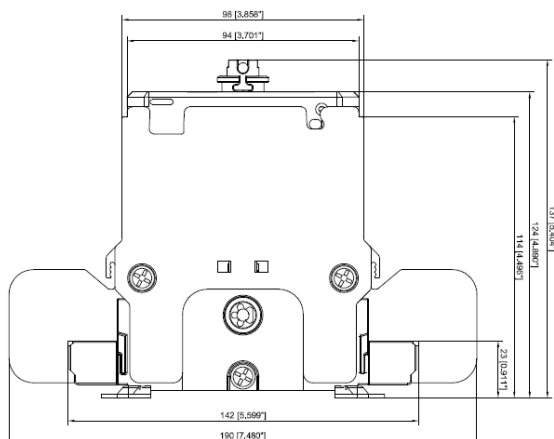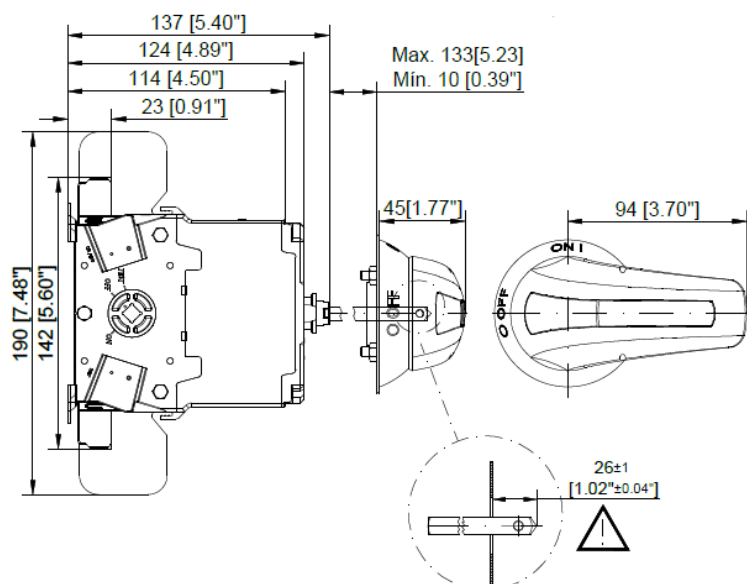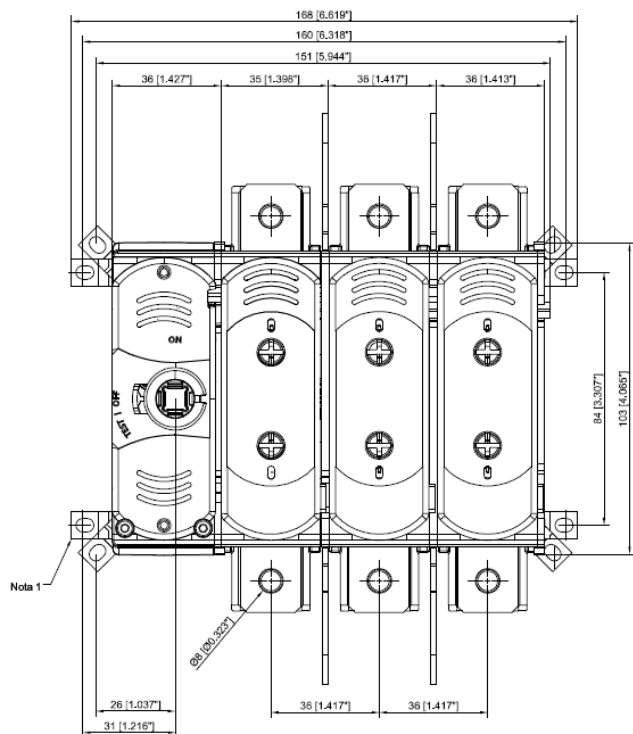

Visit our website for more information www.telergon.com



AC Fuse Disconnect Switch
M3-00603PTJ400L

TELERGON, SAU
Data subject to change without
notice (printed: 21/10/2025)