

AC Fuse Disconnect Switch - Class J – 200A

Front operation, direct or external handle

Part number: M3-02003PSJ600L



*Indicative picture

Standards

UL98
CSA-C22.2 No. 4
Guide WHY
File E363652
IEC 60947-3



Quality Telergon

ISO 9001 & 14001



Electrical data (according to UL98):

Fuse type

J41x146

Electrical Characteristics

Number of poles	3
Rated voltage	600 Vac
Rated current (A)	200

Temperature

Operating temperature	-5...+122F / -15...+50°C
Storage temperature	-40...158F / -40...70°C

Max. HP rating / motor FLA current

240 Vac	50/130
480 Vac	100/124
600 Vac	125/125

Short-circuit ratings at 600V

200 kA

Connection terminals

Max. connection section / AWG	#3/0 AWG-300Kcmil
-------------------------------	-------------------

Mechanical endurance

Number of mechanical operations	8000
Number of electrical operations	6000

Codes

Size	Poles	Switch Part number	Accessories	Part Number
1	3P	M3-01003PSJ600L	External handle (blue)*	DM3SA12
			External handle with TEST position (blue)*	DM3SA11
			External handle (red/yellow)*	DM3SR12
			Direct handle	DM3SI11
			Shaft for external handle Length = 227mm (8.93")	DM3EP13
			Shaft for external handle Length= 395mm (14.76")	DM3EP11
			Lateral external handle (blue)	DM3SB12 (with shaft included Length =227mm (8.93")
			Lateral external handle (red/yellow)	DM3SE12 (with shaft included Length =227mm (8.93")
			Lateral direct handle	DM3SS11
			Auxiliary contact	DM3AUB1
			Auxiliary contact holder	DM3AS11
			Shaft centering guide	DS-EC00
			Terminal shroud	DM3CU12
			Phase barriers (x3)	DM3SF12




*External panel handle with Lock out - tag out capability. UL type NEMA 4X.

Visit our website for more information www.telergon.com

AC Fuse Disconnect Switch
M3-02003PSJ600L

TELERGON, SAU
Data subject to change without
notice (printed: 11/09/2025)

Dimensions (mm)

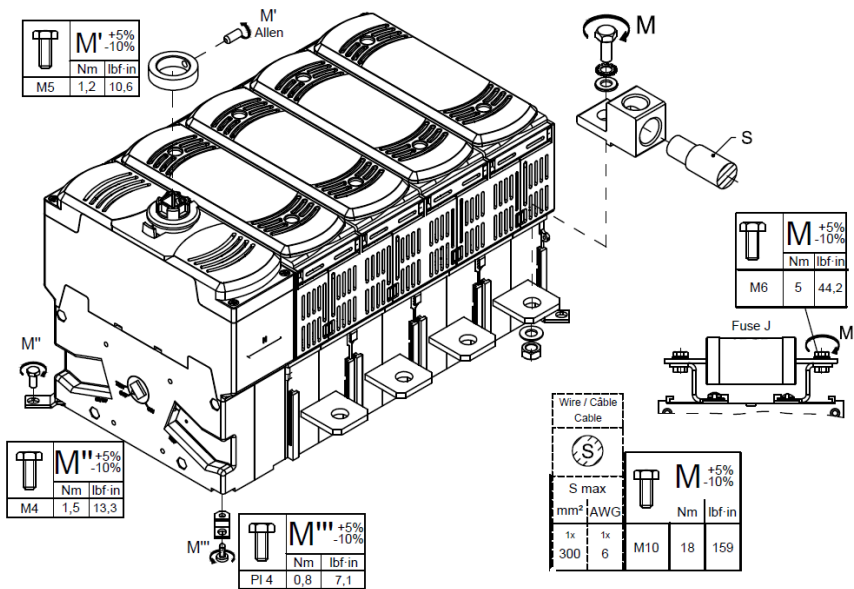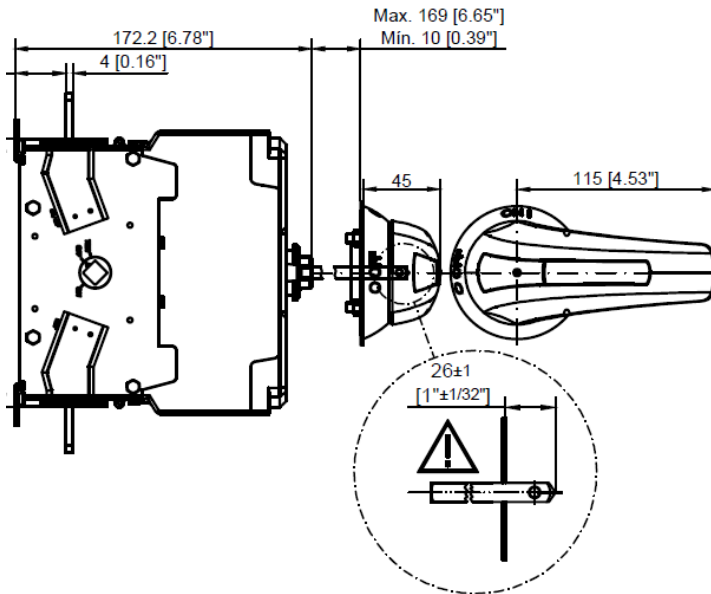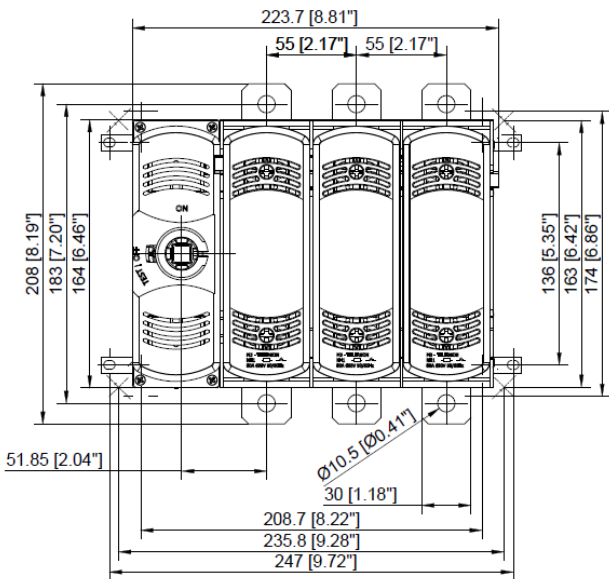

*External panel handle with Lock out - tag out capability. UL type NEMA 4X.

Visit our website for more information www.telergon.com



AC Fuse Disconnect Switch
M3-02003PSJ600L

TELERGON, SAU
Data subject to change without
notice (printed: 11/09/2025)